



Application: 1968-1979 C3 Corvette

Part Includes

1 - Component

LH Outside Mirror



Tools Needed



Search: **Door Components & Hardware**
www.mamotorworks.com

Driver's Side Mirror Replacement for #604-473 & #604-476:

STEP 1.

Remove allenhead screw (see diagram, Item #1). This releases existing mirror from mounting plate.

STEP 2.

Remove existing mirror, then mounting bracket screws (see diagram, Item #2) USE CAUTION—Existing screws can very easily be broken off during removal. If this occurs, the screws MUST be drilled out and threads tapped to complete the installation.

STEP 3.


Remove mounting bracket and gasket.

STEP 4.

To center new gasket, a "loose" installation of the mounting bracket and mirror is required. Place the new gasket on the door and loosely fasten the mounting bracket over the gasket. Fit the mirror onto the mounting bracket and center the gasket around the mirror.

STEP 5.

Carefully hold the gasket in place, remove the mirror and tighten screws into the mounting bracket. Mount the mirror onto the bracket using new allenhead screw.

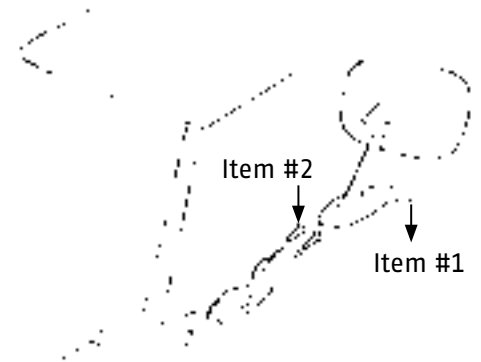

Mamotorworks



@CorvettePassion



MidAmericaMotorworks



CorvettePassion

2900 North Third Street, Effingham, IL 62401

800.500.1500 • Worldwide: 217.540.4200 • FAX: 217.540.4800

www.mamotorworks.com • generalmail@mamotorworks.com

©Mid America Motorworks, Inc. All rights reserved.