



Application: 1990-1996 C4 Corvette

Part Includes

- 1 - Console Cushion
- 1 - Two-sided Tape Kit

Console Cushion



Tools Needed



Search: *Dash & Center Console*
www.mamotorworks.com

STEP 1.

With console lid open, remove the 7 screws that secure the plastic backing plate to the lid, (Illustration A). **NOTE:** Pay close attention to how the latch/spring works for reassembly.

STEP 2.

Remove the 2 screws that hold the light assembly to the backing plate, (Illustration B). Turn the light assembly plate sideways and slide through the hole to remove the backing plate.

STEP 3.

Set the backing plate and the latch/spring aside. Carefully pull loose one side of the white foam pieces securing the wires to the underside of the lid. (Note how the wires lay in the channeled areas of the lid.) The light assembly then stays with the compartment.

STEP 4.



Remove the 2 screws that secure the console lid to the hinge. Your lid is now free to install the Console Cushion.

STEP 5.

Lay your new Console Cushion face down and place the console lid on top, (Illustration C). **NOTE:** The front of the Console Cushion has the split securing flap which corresponds with the latch/spring area.

STEP 6.

Install the double-sided tape in locations shown (Illustration D). **NOTE:** The piece of double-sided tape in front of the latch adheres to the rolled-under vinyl that covers the lid, not the plastic. Remove one side of the protective film and stick to the underside of the lid. Then remove the other side of the protective film (The purpose of the double-sided tape is to hold the securing flaps of the Console Cushion in place until the backing plate is reinstalled.)

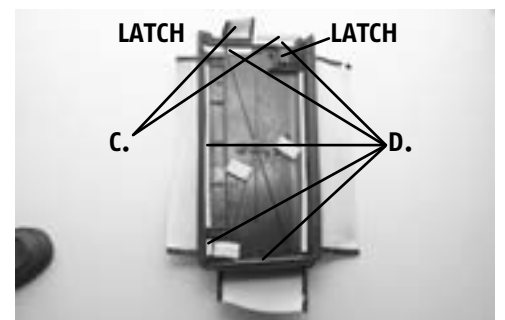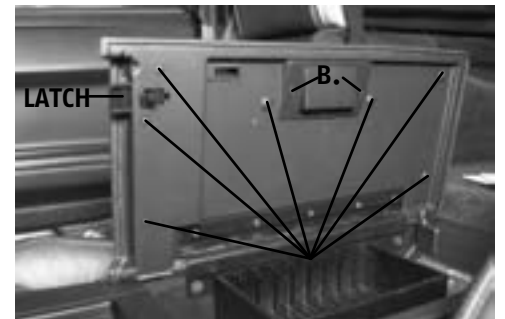

Mamotorworks



@CorvettePassion



MidAmericaMotorworks



CorvettePassion

2900 North Third Street, Effingham, IL 62401
800.500.1500 • Worldwide: 217.540.4200 • FAX: 217.540.4800
www.mamotorworks.com • generalmail@mamotorworks.com
©Mid America Motorworks, Inc. All rights reserved.



Description (cont.)

STEP 7.

Pull the securing flaps of the Console Cushion around the lid and stick to the double-sided tape, as shown (Illustration E). Once this is done you can turn over and make sure that the Console Cushion is centered on the lid and secured. If not, re-adjust flaps for a more snug fit.

STEP 8.

Now you are ready to reinstall the lid (with Console Cushion attached). Reinstall the lid to the hinge, using the 2 screws removed earlier. Next, lay the wires for the light assembly into the channeled areas and under the white foam pieces. If the white foam pieces will not stick to plastic as before, use electrical tape to hold the wires to the lid.

STEP 9.

Slide the light assembly through the hole in the backing plate and replace the 2 screws that secure it. Refer to (Illustration B). Next, reinstall the backing plate to the lid. **(MAKE SURE THE LATCH/SPRING IS REASSEMBLED AND WORKS PROPERLY.)** Replace the 7 screws, removed earlier, that secure the backing plate to the lid, (Illustration B). Your new Console Cushion is now part of the lid.

